

SuPerMax 3000AL Multi-Mode Microplate Reader

——Designed for life science laboratories

Shanghai Flash Spectrum Biotechnology Co., Ltd. was the first manufacturer of grating microplate reader in China, intimately cooperated with Fudan University and Shanghai Jiaotong University, was established at Shanghai Bioengineering Center of Chinese Academy of Sciences. We committed to providing ultra- accurate, ultra-throughput, ultra-performance professional microplate readers for research of clinical, life sciences and pharmacy. **SuPerMax** series has been widely used in organic chemistry, clinical diagnosis, drug screening, molecular biology, immunobiology, cell biology, biochemistry, environmental analysis, food safety inspection, materials science, etc. Flash Spectrum which is a leading brand in the field of ultra-performance microplate readers in China, and the best choice for scientific research institutions and biochemical pharmaceutical factories, can completely replace products from developed countries.

SuPerMax 3000AL Capabilities

1. Assay for absorbance and luminescence, and having a variety of fitting curves for analysis.
2. Assay for activity of protease, kinase and phospholipase.
3. Protein quantification, supporting the methods of UV, NanoOrange, Bradford, Lowry.
4. Assay for microbial growth and bacterial concentration;
5. Assay for luciferase.
6. Assay for luminescence of ALP (alkaline phosphatase) with its substrates.
7. Assay for reactive oxygen species, ATP, cAMP.
8. Assay for cellular activity and cytotoxicity.
9. Assay for absorbance of endotoxin-TAL (Tachypleus Amebocyte Lysate) and microbial suspension.
10. Assay for spectral scanning.
11. The excitation and emission components are high resolution grating monochromators that can set the optimal excitation and emission wavelengths.
12. The built-in grating monochromator has a wavelength range of 190 ~ 1000 nm, wide application.
13. The wavelength resolution of 1 nm, wavelength repeatability of up to 0.2 nm.
14. Top and bottom optics for fluorescence assay.
15. Kinetic measurements, assay for enzymology and flash luminescence.
16. Spectral scanning mode, accurate excitation and emission spectra.
17. Wide temperature range incubation, the maximum temperature 65°C.
18. Oscillation module, no need another shaker.
19. Xenon lamp for light source, High luminous intensity and stability.

20. Optional dispensers for fast assays.
21. Sample detector and reference detector ensure precise detection.
22. Microplate analysis workstation with powerful data analysis capabilities.
23. Automation with parameter setting and self-testing.
24. Using USB interface for easy instrument control and data transfer.
25. Performance is similar with the products from developed countries, cost-effective。

SuPerMax3000AL Performance values

1. General Feature

- Light source: Xenon flash lamp
- Temperature: (RT + 2°C) ~ 65°C
- Shaking mode: Linear, cross, orbital
- Shaking speed: High, middle, slow
- Plate: 96, 384 well (other plate can be customized)

2. Absorbance

- Detector: Photocell
- Spectral range: 190 nm ~ 1000 nm
- Wavelength accuracy: ±1.0 nm
- Wavelength reproducibility: <0.2 nm
- OD linear range: 0 ~ 4 Abs (96well, 450 nm), ±2%
- Inter-hole reproducibility: < 0.006
- Cuvettes: None

3. Luminescence

- Detector: Photon counting PMT
- Spectral range: 300 nm ~ 650 nm
- Limit of detection: 7 amol ATP/well
- Dynamic range > 7 decades
- Inter-hole interference: < 0.2% (white plate)
- Dispensers: Optional

4. Dispensers (Optional)

- Number: 1 or 2
- Volume: 10-1000uL


SuPerMax 3000AL Main Construct:

1. Main engine (include: light source, detector, incubator, shaker)
2. Workstation software of SuPerMax 3000AL Multi-Mode Microplate Reader

Instrument Accessories (Optional)

1. MF-10 incubating oscillator
2. Dispensers
3. Audit trail

Workstation Software Interface of SuPerMax 3000AL Multi-Mode Microplate Reader

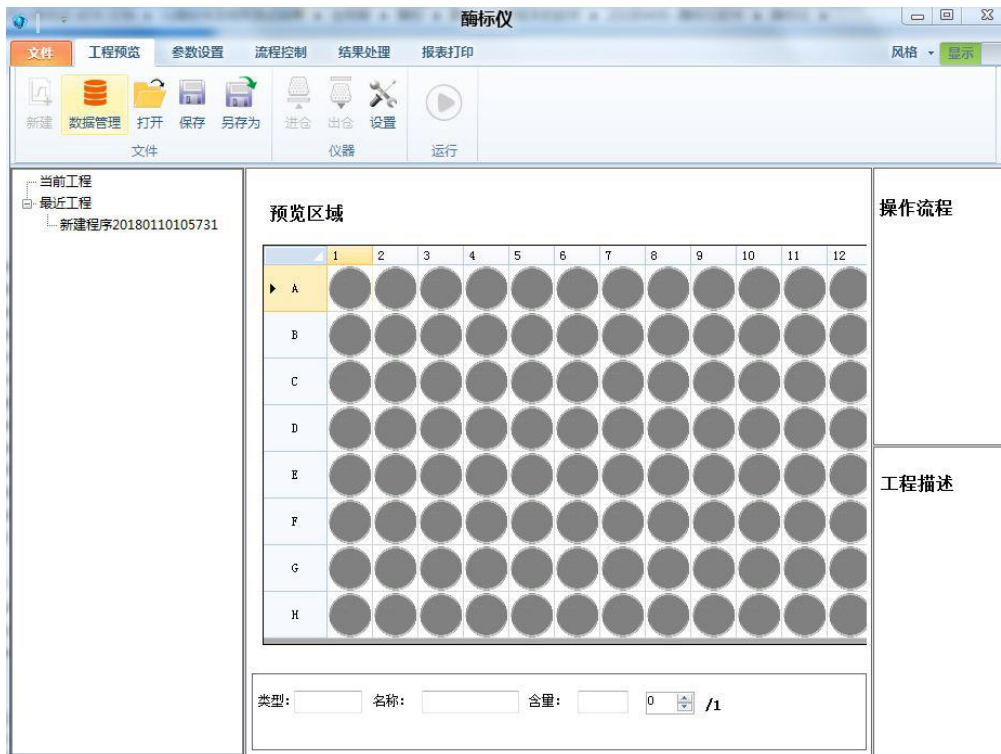

Due to advances in technology, the company reserves the right to change the design without prior notice. Please understand.